

M1G2 Receiver

User Manual



Edition: V1.20200512

Statement

Please read carefully:

Thank you very much for purchasing our product. For instructions on how to use this product, please be sure to read the user manual.

This user manual is for your receiver only. If your receiver does not match the situation in the user manual, the actual situation of the receiver shall prevail.

The information in this document is subject to change without notice; We reserve the right to change or improve its products as well the content without any obligation to notify individual or organization of such changes or improvements. For any questions, please contact the customer service center or contact our authorized dealer.

Customer safety is important. Please read carefully the precautions and instructions in the user manual. To avoid accidental damage, use only original supplied parts. If you do not use the system or connect incompatible accessories in accordance with the correct procedures, it may cause damage to the equipment and may even endanger others and your safety. In this regard, the company does not assume any responsibility

Contents

1.	Product Description	1
1.1	Top View.....	1
1.2	Front View	2
1.3	Right side sight	3
1.4	Left side sight	3
1.5	Sight from the Bottom	4
2.	Technical Specifications.....	5
2.1	Port.....	6
2.2	Data Record.....	6
2.3	Data Flow	7
2.4	User Interface.....	7
2.5	System Configuration.....	7
2.6	The internet.....	7
2.7	Internet service	8
3.	Operating instructions.....	8
3.1	Insert the card	8
3.2	Connect external accessories.....	8
3.3	Power On / Off	9
4.	WebUI	9
4.1	Summary	10
4.2	System Information.....	11
4.3	GNSS Status	12
4.4	Satellite Information	13
4.5	Data transmission	14
4.6	Data Records	15
4.7	Configuration	16
4.7.1	Base station settings	16

4.7.2	Satellite system settings.....	17
4.7.3	Satellite tracking settings	18
4.7.4	Coordinate conversion parameter settings	19
4.7.5	Network settings	20
4.7.6	Dynamic domain name	21
4.7.7	Data transfer settings.....	21
4.7.8	Data record.....	22
4.7.9	Port configuration	23
4.7.10	Reminder Settings.....	25
4.7.11	SNMP Proxy settings	25
4.7.12	Firewall Setting	26
4.7.13	Registration of Device.....	26
4.7.14	Data Download	26
4.8	System Management	27
4.9	Configuration set.....	27
4.10	Language	27
4.11	Logout	28


1. Product Description

The device is a high-precision GNSS receiver for engineering, monitoring, and other applications. The product is suitable for project applications such as vehicle monitoring, engineering inspection, and automated data collection. This chapter provides basic information to help you become familiar with this GNSS receiver.

Main features:

- Robust housing
- Support 4G LTE, UHF and Bluetooth / WLAN data link
- Easy host configuration via webUI and remote server
- Adaptable power requirements to various environments
- Smart chain connection
- IP67

1.1 Top View

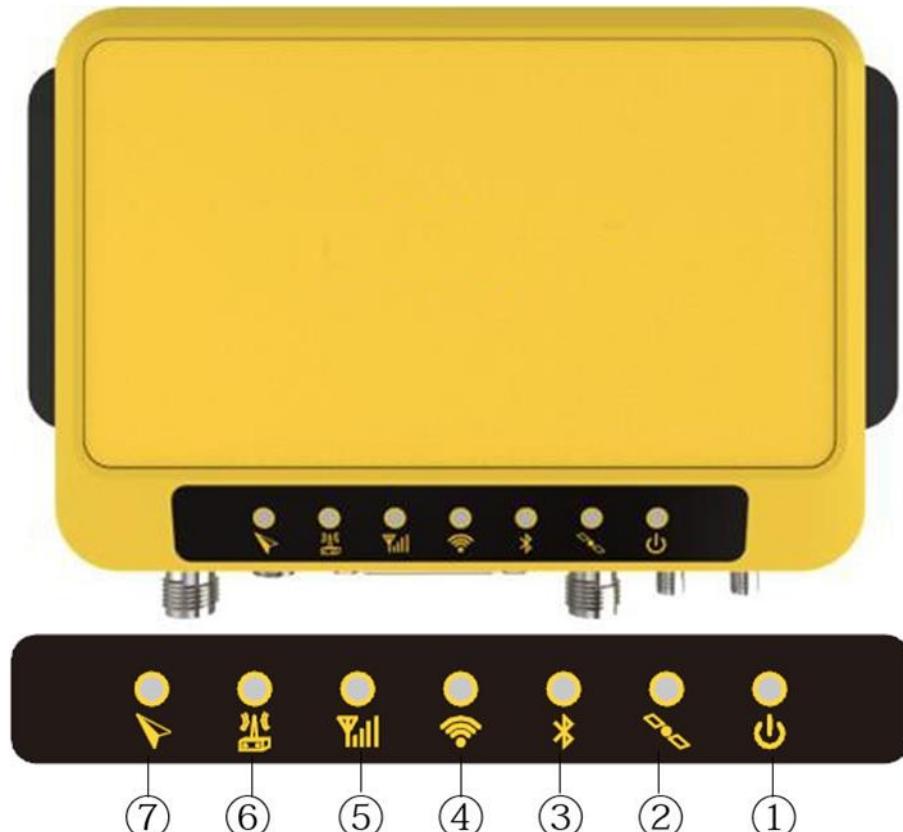

①	Power	Red	Lights up red when power is on, lights off when power is off, no alarm status (cannot turn on below 9V, automatically turns on above 9V);
②	Satellite	Yellow	At single point solution, flashing yellow light at 1s interval; At floating point solution / fixed solution, the satellite light is always on; Invalid solution / below 4 satellites, satellite lights are off;
③	Bluetooth	Blue	Bluetooth connection, Bluetooth light is always on; off when Bluetooth is disconnected;
④	WiFi	Green	Client / AP is steady green when turned on;
⑤	4G Network	Green	Lights green when 4G is turned on, and turns off when 4G is turned off;
⑥	Radio	Green	Lights up green when the function is on and off when the function is off;
⑦	Heading	Green	Lights up green when the function is on and off when the function is off;

1.2 Front View



①	GNSS2	TNC, External antenna connector
②	PWR	2 core LEMO Connector, power interface

	2 RS485 Serial port
	1 RS232 Serial port
	1 USB2.0 Port (supports OTG)
③ D-SUB 26	1 1PPS Output Interface 1 EVENT Port 1 CAN Port 1 100M Ethernet Port
④ GNSS1	TNC, External GNSS Main antenna interface
⑤ LTE	SMA, 4G Antenna Port
⑥ UHF	External UHF Antenna interface

1.3 Right side sight



①	TF Card slot	MicroSD Card slot
②	SIM Card slot	Standard size SIM card slot

1.4 Left side sight



1.5 Sight from the Bottom



2. Technical Specifications

GNSS Performance			
PRO		STD	
Channel	555	Channel	72
Satellite Tracking	GPS: L1 C/A, L1C, L2C, L2P GLONASS: L1 C/A, L2 C/A, L2P BeiDou: B1,B2 Galileo: E1, E5b	Satellite Tracking	GPS : L1C/A GLONASS: L1OF BeiDou: B1 Galileo: E1B/C
NavIc: L5		-	
SBAS: L1,L5		SBAS: L1,L5	
QZSS: L1 C/A, L1C, L2C		QZSS: L1C/A: WAAS, EGNOS, MSAS, GAGAN	
Update rate	5Hz	Update rate	4Hz
Timing accuracy	20ns RMS	Timing accuracy	30ns RMS
RTK accuracy	10mm + 1ppm	RTK accuracy	3.0m (Float)
SBAS accuracy	60cm RMS	SBAS accuracy	Horizontal: 2.0m
DGPS accuracy	40cm RMS	DGPS accuracy	Vertical: 2.5m
Velocity accuracy	<0.03m/s RMS	DGPS accuracy	-
Heading accuracy	2m baseline: 0.08 degrees 4m baseline: 0.05 degrees	Cold start	<30s
		Warm start	<2s
Hot start	<19s	Hot start	<1s
Reacquisition	<1s	Max Elevation	500m/s
Max Speed	1,850km/h	Max speed	500m/s
System		Communication	
Operation system	Linux	Network Modem	Integrated 4G Modem
Processor	AM335X Sitara ARM Cortex-A8	Bluetooth	V2.1+EDR / V4.1, Class2
Internal memory	512MB RAM+8GB storage	WLAN	WIFI IEEE 802.11 b/g/n
Expanded memory	Up to 32GB	UHF	TX/RX: 410MHz – 470MHz
Radio Modem	TRM101 (Channel 555)	Transmit Power: 1 W	
Electrical		Ports	
Power input	10 to 28V DC	D-SUB 26 interface: 2 x RS485 port , 1 x RS232 port , 1 x USB2.0 port (OTG supported)	
Physical & Environmental			
Weight	550g	1 x 1PPS port , 1 x EVENT interface	
Size	150mm*105mm*34mm	1 x CAN interface, 1 x 100M ethernet port	
Operation temperature	-30°C to +65°C	PWR: 2-pin LEMO for power input	
Storage temperature	-40°C to +80°C	GNSS1: TNC port for main GNSS antenna	
IP Level	IP67	GNSS2: TNC, TNC for auxiliary GNSS antenna (Channel 555)	
Shock	Withstands 1.5m drop on concrete	LTE: SMA, 4G antenna port	
Vibration	50Hz, 0.5mm, 5mins	Others	SIM card slot, TF card slot

Illustrations and technical specifications are subject to change without notice.

2.1 Port

- D-SUB 26
 - 2 RS485 Port
 - 1 RS232 Port
 - 1 USB2.0 Port (Support OTG)
 - 1 1PPS Output Interface
 - 1 EVENT Port
 - 1 CAN Port
 - 1 100M Ethernet interface
 - PWR 2 core LEMO power Connector Port
 - GNSS1 TNC, External GNSS Main antenna Port
 - GNSS2 TNC, External antenna connector
 - LTE SMA, 4G Antenna Port
 - UHF External UHF antenna interface
 - SIM Standard size SIM card Slot
 - TF card MicroSD Slot
-

2.2 Data Record

- Storage
-

Device	description
In Built storage	8G
External storage	MicroSD card

- Data Types: Binary, RINEX, BINEX
- Transmission rate: 2S, 5S, 10S, 15S, 30S, 60S 1Hz, 2Hz, 5Hz, (Optional 10Hz, 20Hz)

2.3 Data Flow

- Stream number One NTRIP Server stream, one NTRIP Client stream, 5 Serial port (TCP / UDP) flow
 - Stream port WIFI, Wireless, UHF, Ethernet, COM1, COM3
 - Navigation output GGA, ZDA, GSA, GSV, GST, VTG, RMC, GLL
 - Differential output RTCM 2.3, 3.0, 3.2, CMR, CMR+, DGPS, BINEX, RAW
-

2.4 User Interface

- LEDs 7 LED Lights, showing power, satellite, Bluetooth respectively、WIFI, network, radio, and heading status
-

2.5 System Configuration

- operating system Linux
 - Bluetooth Bluetooth 2.1+EDR, V4.0
 - WIFI 802.11 b/g/n, Hotspot/client mode
 - Ethernet 100M
-

2.6 The internet

System	Frequency
LTE FDD	B1/B2/B3/B4/B5/B7/B8/B12/B13/B18/B19/B20/B25/B26/B28
LTE TDD	B38/B39/B40/B41
UMTS	B1/B2/B4/B5/B6/B8/B19
GSM	B2/B3/B5/B8

2.7 Internet service

- NTRIP Server / client
 - Remote management GNSS.NET Remote configuration
 - FTP server For data download
 - E-mail alert Used for low storage and other warning messages

3. Operating instructions

3.1 Insert the card

If you need a SIM card, please insert the SIM card before turning on the device. Please see the figure below. Firstly, open the card holder, then insert the SIM card and micro SD card as a note in the card holder.



3.2 Connect external accessories

In order to achieve the working state, the device needs to be connected to an external antenna, which can be connected to the GNSS 1 / 2.

If you need to power on the device, it must be connected to a 2-pin power cable.

If you need a SIM card, insert SIM card and connect the 4G antenna to the LTE interface.

If you need to use the radio, you should connect the radio antenna to the radio interface.



3.3 Power On / Off


Once device is connected to the 2-pin power cable, it will automatically power on after the power has been turned on.

After power is on, the indicator will show the devices status. For example, the power light is red. If you turn on WIFI, WIFI will turn green. When the device has no power supply, it will automatically shut down.

4. WebUI

The device has Web user interface function, you can connect to device with WIFI to log into the Web interface to view device information and settings. The WIFI hotspot name is the serial number of the device. Enter the IP address: 192.168.10.1. When the user logs in, a window will pop up, and the account and password will need to be filled in.

- Username: admin
- Password: password.

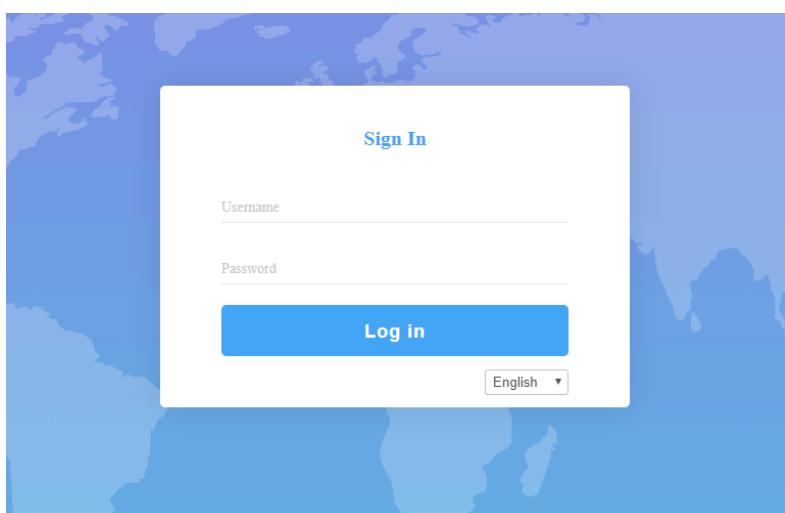

4.1 Summary

After verifying the login information, you can log in to the device web interface. The homepage content includes station name, expiration date, running time, equipment model, equipment serial number, GNSS model, GNSS serial number, radio model, radio serial number, and receiver location information. As shown below:

M1G2 Reference Station

- [Summary](#)
- [System Information](#)
- [| System Information](#)
- [| GPS Status](#)
- [| Satellites](#)
- [| Data Transmission](#)
- [| Data Recording](#)
- [Configuration](#)
- [| Reference Station](#)
- [| GNSS Configuration](#)
- [| Tracking Satellites](#)
- [| Convert Coordinate](#)
- [| Network](#)
- [| Dynamic DNS](#)
- [| Ntrip Server](#)
- [| Recording](#)
- [| Port Configuration](#)
- [| Trace back Settings](#)
- [| Alerts](#)
- [| SNMPD](#)
- [| Firewall](#)
- [| Registration](#)
- [Download](#)
- [System Management](#)
- [Configuration Set](#)
- Language [English ▾](#)
- [Logout](#)

Station Name	Test
Expire Date	20200720
Run Time	3 min
Device Model	M1G2
Device Serial	M1G2292000015
GNSS Model	OEM718D
GNSS Serial	BMNM19280318X
Radio Model	TRM101
Radio Serial	
Longitude	121°31' 49.38446"
Latitude	31° 5' 3.87880"
Height	63.214 m
GNSS Status	
Local Time	2020-04-26 15:08:39
Internal Memory	42.194 MB / 223.866 MB (18%)
Data Memory	6.743 GB / 6.743 GB (99%)
External Memory	/ (0%)
TF Memory	/ (0%)
Battery Power	-%
Power Source	

4.2 System Information

The system information interface will display the reference station name, device model, serial number, system version, application version information, built-in OEM Board information, built-in station information, storage parameter information.

M1G2 Reference Station

- Summary
- System Information
- System Information
- GPS Status
- Satellites
- Data Transmission
- Data Recording
- Configuration
- Reference Station
- GNSS Configuration
- Tracking Satellites
- Convert Coordinate
- Network
- Dynamic DNS
- Ntrip Server
- Tracking Satellites
- Convert Coordinate
- Network
- Dynamic DNS
- Ntrip Server
- Tracking Satellites
- Convert Coordinate
- Network
- Dynamic DNS
- Ntrip Server
- Recording
- Port Configuration
- Trace back Settings
- Alerts
- SNMPD
- Firewall
- Registration
- Download
- System Management
- Configuration Set
- Language English ▾
- Logout

Station Name	Test
Expire Date	20200720
Time Zone	GMT+08:00
Device Model	M1G2
Device Serial	M1G2292000015
IMEI	867698040586110
Hardware Version	M1G2-V4.11
BOOT Version	0111
OS Version	4.1.6-0113-M1G2
APP Version	2.12(200108)
Web Version	2.12
MCU Version	0205
GNSS Model	OEM718D
GNSS Serial	BMNM19280318X
GNSS Hardware Version	OEM718D-1.01
GNSS Firmware Version	OM7MR0500SN0032
GNSS Functionality	CDDRYNTBN (GPS+Glonass+BeiDou,20Hz)
Radio Model	TRM101
Radio Serial	
Radio Firmware Version	0.1
Radio Channel	2 [440.125 MHz, H]
Radio Protocol	South 9600
DHCP	
MAC address	D4:53:83:60:2F:73
IP	192.168.40.144
Mask	255.255.255.0
Gateway	192.168.40.10
Internal Memory	42.194 MB / 223.866 MB (18% Free)
Data Memory	6.743 GB / 6.743 GB (99% Free)
External Memory	/ (0% Free)
TF Memory	/ (0% Free)
Battery Power	-%
Power Source	External

4.3 GNSS Status

The status page shows the current device positioning status, base station coordinates, weather meter type and antenna type usage information.

M1G2 Reference Station

- [Summary](#)
- [System Information](#)
- [| System Information](#)
- [| GPS Status](#)
- [| Satellites](#)
- [| Data Transmission](#)
- [| Data Recording](#)
- [Configuration](#)
- [| Reference Station](#)
- [| GNSS Configuration](#)
- [| Tracking Satellites](#)
- [| Convert Coordinate](#)
- [| Network](#)
- [| Dynamic DNS](#)
- [| Ntrip Server](#)
- [| Recording](#)
- [| Port Configuration](#)
- [| Trace back Settings](#)
- [| Alerts](#)
- [| SNMPD](#)
- [| Firewall](#)
- [| Registration](#)
- [Download](#)
- [System Management](#)
- [Configuration Set](#)
- [Language English ▾](#)
- [Logout](#)

Local Time	2020-04-26 15:10:44 (GPS Time + 8)
Satellites	24
Longitude	121°31' 49.37925"
Latitude	31° 5' 3.87516"
Height	63.400 m
Status	Single
PDOP	1.231
HDOP	0.640
HRMS	1.719
VRMS	3.125
Station Number	0111
Base Longitude	113°21' 59.82440"
Base Latitude	23° 7' 35.67690"
Base Height	30.000 m
MET Type	ZZ11A
Pressure	- hPa
Temperature	- °C
Humidity	- %RH
Antenna Type	HX-GG486A
Antenna Height	0 mm
Measurement Mode	Antenna Phase Center

4.4 Satellite Information

On this page you can see satellite maps and satellite lists.

M1G2 Reference Station

Summary
System Information
| System Information
| GPS Status
| Satellites
| Data Transmission
| Data Recording
Configuration
| Reference Station
| GNSS Configuration
| Tracking Satellites
| Convert Coordinate
| Network
| Dynamic DNS
| Ntrip Server
| Recording
| Port Configuration
| Trace back Settings
| Alerts
| SNMPD
| Firewall
| Registration
Download
System Management
Configuration Set
Language English ▾
Logout

Satellites Table Satellites Skypot

Type	SV	Elev.[Deg]	Azim.[Deg]	L1/B1/E1[dBHz]	L2/B2/E5A[dBHz]
GPS	1	69.44	38.83	51	51
GPS	3	29.64	139.98	44	44
GPS	7	36.73	209.71	47	47
GPS	8	23.14	66.99	45	40
GPS	11	40.61	43.61	49	41
GPS	17	25.51	283.68	46	46
GPS	22	38.28	108.38	48	41
GPS	28	40.86	322.53	48	40
GPS	30	44.77	254.16	49	49
GLONASS	14	50.05	170.80	48	42
GLONASS	15	67.30	305.60	44	40
GLONASS	17	56.45	336.60	40	38
GLONASS	18	33.92	263.33	41	38
GLONASS	24	23.02	34.88	37	35
BDS	1	46.37	140.41	46	46
BDS	2	35.00	235.17	41	45
BDS	3	52.33	200.79	47	46
BDS	4	35.65	122.19	43	44
BDS	5	14.22	254.31	39	43
BDS	7	79.80	104.30	48	48
BDS	8	70.50	219.19	45	48
BDS	10	70.27	322.36	45	48
BDS	12	23.84	264.44	41	46
BDS	13	43.76	219.39	46	44
BDS	19	17.52	99.94	43	0
BDS	24	33.60	308.21	47	0
BDS	26	61.67	238.04	51	0
BDS	29	15.01	58.09	43	0

Satellites Used(24): GPS(9), BDS(10), GLONASS(5)
Satellites Tracked(28): GPS(9), BDS(14), GLONASS(5)

4.5 Data transmission

This page displays the current data transmission status. Click [Edit] to set the transmission parameters.

M1G2 Reference Station

Summary
System Information
| System Information
| GPS Status
| Satellites
| Data Transmission
| Data Recording
Configuration

Name	Server Address	Mountpoint	Data Type	Interval	Status	Start Time	Data Size	Operation
01	183.60.177.84.2012	TEST1	RTCM3	1S	idle		0 B	<input type="button" value="Edit"/> <input type="button" value="Start"/> <input type="button" value="Stop"/>
RTCM32	219.142.87.73.2102	Test01	RTCM32	1S	connecting		0 B	<input type="button" value="Edit"/> <input type="button" value="Start"/> <input type="button" value="Stop"/>

When you click "New Transfer", this page will pop up to prompt you to add a connection.

Ntrip Server

Add Connection ▾

Name	<input type="text"/>
Server Address	<input type="text"/>
Server Port	<input type="text"/>
Version	V1.0 ▾
Password	<input type="text"/>
Mountpoint	<input type="text"/>
Data Type	<input checked="" type="radio"/> RTCM3.0 <input type="radio"/> RTCM2.3 <input type="radio"/> CMR <input type="radio"/> CMR+ <input type="radio"/> RTCM3.2 <input type="radio"/> DGPS <input type="radio"/> RAW
Interval	1HZ ▾
Auto Connect	<input type="radio"/> Enable <input checked="" type="radio"/> Disable

4.6 Data Records

Data records are used to store static data for data analysis, static results, and other post-processing results. On this page, the user can view the current data recording status and click [Edit] to set the recording parameters.

Schedule Name	Interval	Path	Status	Start Time	Duration Tme	File Size	Operation
Test	1S		idle	undefined	60 min	0 B	<button>Edit</button> <button>Start</button> <button>Stop</button>

New Session

Raw Data Recording Configuration

Compress(Global) :

Data Type :

Schedule Name	
Path Type	Session/Date
File Name	ssssdddf.yt
File System	/Internal
Interval	1HZ
Duration Tme	1 hour
Pool	Off
Auto	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Integral Point Record	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
File Push	<input type="radio"/> Enable <input checked="" type="radio"/> Disable

Push Parameters

Protocol	<input checked="" type="radio"/> FTP <input type="radio"/> GEO <input type="radio"/> RADIO
FTP Server Address	
FTP Server Port	
FTP User	
FTP Password	
Remote Directory	

Convert Enable Disable

4.7 Configuration

4.7.1 Base station settings

This page mainly sets the reference station name, mark number, receiver number, country code and time zone, etc.

Observer Name	OBSERVER
Agency Name	AGENCY
Station Name	Test
Marker Number	0 ▾
Marker Type	GEODETIC ▾
Receiver Number	0 ▾
Country Code	CHN - China ▾
Site ID	
Time Zone	GMT+08:00 ▾
HTTP Server Port	80

Working mode: Set device to reference station or mobile station.


Working Mode	<input type="radio"/> Base <input checked="" type="radio"/> Rover
--------------	---

Antenna parameters: Select the corresponding antenna type and then enter the actual antenna height of the station.

Antenna Type	HX-GG486A ▾
Antenna Serial	
R(mm)	0
H(mm)	0
HL1(mm)	116
HL2(mm)	142

Reference station coordinates: If you don't need a known coordinate to start the reference station, click "Get the current coordinate" as a reference Check the coordinates.

However, if you need a known coordinate to start the reference station, follow the correct format to enter the known point coordinates.

Coordinate System	Geodetic Coordinates (B,L,H) ▼	
Base Longitude	113 ° 21 ' 59 " . 8244004 "	
Base Latitude	23 ° 7 ' 35 " . 6769012 "	
Base Height(m)	30.000	
Height of the point on the ground(m)	0	
Antenna Height(mm)	0	
Measurement Mode	Antenna Phase Center ▼	
		Load Current Position Cancel Base Position
Submit		Reload

4.7.2 Satellite system settings

On this page, you can set the information of tessellate system and the cut off angle height.

GNSS Configuration	
Cutoff Angle	10
1PPS	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Clock Switch	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Smooth Pseudorange	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
BDS	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
GPS	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
GLONASS	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Galileo	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
QZSS	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
SBAS	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
RTK MODE	<input checked="" type="radio"/> NORMAL <input type="radio"/> Extra safe
RTK dynamics mode	<input type="radio"/> STATIC <input checked="" type="radio"/> DYNAMIC
Submit	
Reload	

4.7.3 Satellite tracking settings

On this page, you can choose the satellite you want.

Tracking Satellites							
GPS	Don't track	Glonass	Don't track	BeiDou	Don't track	Galileo	Don't track
G1	<input type="checkbox"/>	R1	<input type="checkbox"/>	C1	<input type="checkbox"/>	E1	<input type="checkbox"/>
G2	<input type="checkbox"/>	R2	<input type="checkbox"/>	C2	<input type="checkbox"/>	E2	<input type="checkbox"/>
G3	<input type="checkbox"/>	R3	<input type="checkbox"/>	C3	<input type="checkbox"/>	E3	<input type="checkbox"/>
G4	<input type="checkbox"/>	R4	<input type="checkbox"/>	C4	<input type="checkbox"/>	E4	<input type="checkbox"/>
G8	<input type="checkbox"/>	R8	<input type="checkbox"/>	C8	<input type="checkbox"/>	E8	<input type="checkbox"/>
G10	<input type="checkbox"/>	R10	<input type="checkbox"/>	C10	<input type="checkbox"/>	E10	<input type="checkbox"/>
G19	<input type="checkbox"/>	R19	<input type="checkbox"/>	C19	<input type="checkbox"/>	E19	<input type="checkbox"/>
G20	<input type="checkbox"/>	R20	<input type="checkbox"/>	C20	<input type="checkbox"/>	E20	<input type="checkbox"/>
G25	<input type="checkbox"/>	R25	<input type="checkbox"/>	C25	<input type="checkbox"/>	E25	<input type="checkbox"/>
G32	<input type="checkbox"/>					E32	<input type="checkbox"/>
						E33	<input type="checkbox"/>
						E34	<input type="checkbox"/>
						E35	<input type="checkbox"/>
						E36	<input type="checkbox"/>

4.7.4 Coordinate conversion parameter settings

This page is used to convert coordinate parameters.

Convert Coordinate	
<input checked="" type="radio"/> Enable <input type="radio"/> Disable	
Destination Datum	
Datum	WGS84 ▾
Semi-Major Axis(a)	6378137
Bot-Flattening(1/f)	298.257223563
Seven Parameter	
Use Seven Parameter	<input checked="" type="checkbox"/>
dX(m)	0
dY(m)	0
dZ(m)	0
RotateX(")	0
RotateY(")	0
RotateZ(")	0
Scale(ppm)	0
Projection Parameter	
Projection Type	Gauss ▾
CenterMeridian(°)	0.0000000000
Scale	1
North(m)	0
East(m)	0
Ref-Height	0
Base-Lat(°)	0
Base-Lon(°)	0.0000000000
Parellel1	0
Parellel2	0
Four Parameter	
Use Four Parameter	<input type="checkbox"/>
dX(m)	0
dY(m)	0
Rotate(")	0
Scale(ppm)	0
<input type="button" value="Submit"/>	<input type="button" value="Reload"/>

4.7.5 Network settings

This page is mainly set for the data chain mode used by device.

The Running Network		
Priority Network	<input checked="" type="radio"/> Wired Net <input type="radio"/> Wireless Net <input type="radio"/> Mobile Net	
Current Network	WAN	
Default Gateway	192.168.28.253	
DNS	114.114.114.114 8.8.8.8	
PING	Timeout :	(s)
PING	Counts :	

Device Network Settings		
Wired Net	<input checked="" type="radio"/> WAN	
DHCP	<input checked="" type="radio"/> Enable <input type="radio"/> Disable	
IP	192.168.28.59	
Mask	255.255.255.0	
Gateway	192.168.28.253	
MAC address	04:79:B7:E3:E1:CE	
Link Status	Link disconnected	
Status	Route disconnected	

Wireless Net	<input type="radio"/> Client <input checked="" type="radio"/> Hotspot <input type="radio"/> Disable
MAC address	D4:53:83:60:2F:73
SSID	M1G2292000015
Password	12345678
IP	192.168.10.1

Mobile Net	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
------------	---

FTP Server Settings		
Anonymous Access	Disable ▼	
User	123	
Password	***	

NTP		
NTP Server	<input type="radio"/> Enable <input checked="" type="radio"/> Disable	

4.7.6 Dynamic domain name

This page is mainly used to set dynamic domain name, service, host name, user name, password and so on.

Dynamic DNS

Dynamic DNS	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Service Provider	oray.com ▾
Host Name	
Username	
Password	

4.7.7 Data transfer settings

In this page, you can set the transfer content and server for reference station.

Note: Passwords in this page can be entered arbitrarily, but cannot be empty.

Ntrip Server

Ntrip Server 1 ▾	
Name	01
Server Address	183.60.177.84
Server Port	2012
Version	V1.0 ▾
Password	...
Mountpoint	TEST1
Data Type	<input checked="" type="radio"/> RTCM3.0 <input type="radio"/> RTCM2.3 <input type="radio"/> CMR <input type="radio"/> CMR+ <input type="radio"/> RTCM3.2 <input type="radio"/> DGPS <input type="radio"/> RAW
Interval	1HZ ▾
Auto Connect	<input type="radio"/> Enable <input checked="" type="radio"/> Disable

- When select [Automatic Connection] to open, after the network is disconnected, it will automatically connect the data transmission, otherwise it needs to manually start the transmission.

- Before setting the parameters, please go back to the reference station page to confirm that the base station coordinates are correct. If you need to start with a known coordinate, please enter a known coordinate.
- When the parameter settings are completed, click submit and the data transmission opens. In the status bar, you can see that the data transmission status is shown as "being transferred ". the host front panel differential transmission indicator starts flashing. The above process is to establish a base station transmission mode.

4.7.8 Data record

In this page, you can set up compressed storage, data format, time period name, path form and so on, and you can also choose the protocol.

Raw Data Recording Configuration

Compress(Global) :	<input type="button" value="Off ▾"/>
Data Type :	<input type="button" value="RANGE ▾"/>
Recording - Test ▾	
Schedule Name	<input type="text" value="Test"/>
Path Type	<input type="button" value="Session/Date ▾"/>
File Name	<input type="button" value="ssssdddf.yyt ▾"/>
File System	<input type="button" value="/Internal ▾"/>
Interval	<input type="button" value="1HZ ▾"/>
Duration Time	<input type="button" value="1 hour ▾"/>
Pool	<input type="button" value="Off ▾"/>
Auto	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Integral Point Record	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
File Push	<input type="radio"/> Enable <input checked="" type="radio"/> Disable
Push Parameters	
Protocol	<input checked="" type="radio"/> FTP <input type="radio"/> GEO <input type="radio"/> RADIO
FTP Server Address	<input type="text"/>
FTP Server Port	<input type="text"/>
FTP User	<input type="text"/>
FTP Password	<input type="text"/>
Remote Directory	<input type="text"/>
<input type="button" value="Convert"/> <input type="radio"/> Enable <input checked="" type="radio"/> Disable	
<input type="button" value="Submit"/> <input type="button" value="Delete"/> <input type="button" value="Reload"/> <input type="button" value="Cancel"/>	

4.7.9 Port configuration

This page is mainly used to set up Bluetooth, Radio, COM1, COM3, NTRIP client, NTRIP server, Socket 1, Socket 3, Socket 4, Socket 5.

I/O Configuration :

Bluetooth			
Bluetooth	Bluetooth	<input checked="" type="radio"/> Enable <input type="radio"/> Disable	
UHF	Function	NMEA(Output) <input type="button" value="▼"/>	
COM1	GGA: 1HZ <input type="button" value="▼"/> GSA: Off <input type="button" value="▼"/> GSV: Off <input type="button" value="▼"/> ZDA: Off <input type="button" value="▼"/> RMC: Off <input type="button" value="▼"/> VTG: Off <input type="button" value="▼"/> GST: Off <input type="button" value="▼"/> GLL: Off <input type="button" value="▼"/> HDT: Off <input type="button" value="▼"/> HEADINGA: Off <input type="button" value="▼"/>		
COM2			
COM3			
Ntrip Client			
Ntrip Caster			
Socket 1			
Socket 2			
Socket 3			
Socket 4			
Socket 5			

I/O Configuration :

Bluetooth	<input checked="" type="radio"/> Enable <input type="radio"/> Disable			
Function	NMEA(Output) CMD(Input/Output)			
NMEA	NMEA(Output) RTK(Input) RTK(Output) RAW(Output) BINEX(Output)	Off Off Off Off Off	GSV: GST: ZDA: NGA:	Off Off Off Off
			ZDA:	Off
			GLL:	Off

I/O Configuration :

COM1	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Baud Rate	115200
Function	<input type="button" value="NMEA(Output)"/> <input type="button" value="CMD(Input/Output)"/> <input type="button" value="NMEA(Output)"/> <input type="button" value="RTK(Input)"/> <input type="button" value="RTK(Output)"/> <input type="button" value="RAW(Output)"/> <input type="button" value="BINEX(Output)"/> <input type="button" value="GPS(Input/Output)"/> <input type="button" value="UHF(Input/Output)"/> <input type="button" value="NtripDouble(Output)"/>
NMEA	<input type="button" value="Off"/> <input type="button" value="Off"/> <input type="button" value="Off"/> <input type="button" value="GA: Off"/>
	<input type="button" value="GSV: Off"/> <input type="button" value="GST: Off"/> <input type="button" value="ZDA: Off"/> <input type="button" value="GLL: Off"/>
	<input type="button" value="Submit"/> <input type="button" value="Reload"/>

I/O Configuration :

UHF ▼

UHF	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Radio Channel	2 ▼ 440.125 MHz Default Frequency
Radio Protocol	South 9600 ▼
Radio Power	High ▼
Channel Spacing	25 ▼
Function	RTK(Output) ▼
Data Type	RTCM3.0 ▼
Interval	1HZ ▼

I/O Configuration :

Ntrip Client ▼

Ntrip Client	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
IP:Port	183.60.177.84:2012
Version	V1.0 ▼
Mountpoint	TEST <input type="button" value="Get Mountpoint"/>
Upload GGA	10S ▼
User	user
Password	****

I/O Configuration :

Ntrip Caster ▼

Ntrip Caster	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Port	6070

I/O Configuration :

Socket 1 ▼

Socket 1	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Type	TCP ▼
Mode	Server ▼
Port	6060
Function	RAW(Output) ▼
Interval	1HZ ▼
Ephemeris Frequency	RANGE ▼ Off ▼

Submit

Reload

4.7.10 Reminder Settings

This page is mainly used to install e-mail, text messages, telephone numbers. If you want to send message, you need to use the mobile network.

Alerts

E-Mail Alerts	<input checked="" type="radio"/> Enable <input type="radio"/> Disable	
SMTP Server	: <input type="text"/>	
From E-Mail Address	<input type="text"/>	
E-Mail Login Name	<input type="text"/>	
E-Mail Login Password	<input type="text"/>	
To E-Mail Address	<input type="text"/>	
Test		
SMS Alerts	<input checked="" type="radio"/> Enable <input type="radio"/> Disable	
Phone Number	<input type="text"/>	
Test		
<input type="checkbox"/> Temperature is above a limit <input type="text"/> °C	<input type="checkbox"/> Internal Disk space is close to be full (under 500Mb)	<input type="checkbox"/> GNSS satellites drop below an amount <input type="text"/> 5
<input type="checkbox"/> Difference between estimated coordinates and base coordinates over <input type="text"/> 40 m		

Submit

Reload

4.7.11 SNMP Proxy settings

When you come to SNMPPD, you can see [Trap IP] and [Allow Access IP].

[Trap IP]: Receivers can specify some IPS and then automatically send information to those IPS.

[Allow Access IP]: Receivers can allow some devices to proactively obtain information about receivers through IP addresses.

SNMPD

SNMPD	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Trap IP	<input type="text"/> (Please separate by ':')
Allow Access IP	<input type="text"/>

4.7.12 Firewall Setting

On this page, you can choose whether to open a firewall.

Firewall

Network Services Filter	<input checked="" type="radio"/> Enable <input type="radio"/> Disable
Filter Table Type	<input style="border: none; background-color: inherit; color: inherit; font-size: inherit; padding: 0; margin: 0;" type="button" value="Black List"/> <input style="border: none; background-color: inherit; color: inherit; font-size: inherit; padding: 0; margin: 0;" type="button" value="White List"/> <input style="border: none; background-color: inherit; color: inherit; font-size: inherit; padding: 0; margin: 0;" type="button" value="Black List"/>
Source IP	Operation
<input type="button" value="Add"/>	

4.7.13 Registration of Device

Device Serial	M1G2292000015
Old AuthCode	39360B6510059CAD477BFF144BD46C71
Expire Date	20200720
Register Status	NORMAL
AuthCode	<input type="text"/>

4.7.14 Data Download

On this page, you can download observations and ephemeris.

Select	Name	Size	Creation Time	Modification Time	Operation
<input type="checkbox"/>	INTERNAL	25.746M	-	-	FTP Push Package Delete
Select All	Package	Delete Selected	Prev	1	(1/1) Next

4.8 System Management

On this page you can set up online upgrade, remote debugging, view log, security.

Online Upgrade 1. Upload File <input type="button" value="Choose File"/> No file chosen <input type="button" value="Upgrade"/>
<hr/> Remote Debug <input type="radio"/> Enable <input checked="" type="radio"/> Disable <input type="button" value="Submit"/>
<hr/> View Logs 1. APP Log <input type="button" value="Download"/> <input type="button" value="View"/> 2. OS Log <input type="button" value="Download"/> <input type="button" value="View"/> 3. Kernel Log <input type="button" value="Download"/> <input type="button" value="View"/> 4. Audit Log <input type="button" value="Download"/> <input type="button" value="View"/>
<hr/> Security <input checked="" type="checkbox"/> Enable Login Authentication Current User : admin Old Password : <input type="text"/> New Password : <input type="text"/> Verify New Password <input type="text"/> <input type="button" value="Change"/> <input checked="" type="checkbox"/> Enable Guest New Guest Password : <input type="text"/> Verify New Password <input type="text"/> <input type="button" value="Change"/>
<hr/> <input type="button" value="Self Test"/> <input type="button" value="Reset Device"/> <input type="button" value="Freset OEM"/> <input type="button" value="Factory Reset"/> <input type="button" value="Format Internal Disk"/>

4.9 Configuration set

You can set a profile on this page.

Config Files	Save config	Restore config		
System config	<input type="button" value="Download"/>	<input type="button" value="Choose File"/>	No file chosen	<input type="button" value="Upload"/>
Service config	<input type="button" value="Download"/>	<input type="button" value="Choose File"/>	No file chosen	<input type="button" value="Upload"/>
User config	<input type="button" value="Download"/>	<input type="button" value="Choose File"/>	No file chosen	<input type="button" value="Upload"/>

4.10 Language

It can be seen that MG 10 S has four languages available. Russian, English, Simplified Chinese, Traditional Chinese.



4.11 Logout

When you click log out, you will exit and return to the page.

